

U.S. Des. Pat. No. D587,090

The Veritas® Small Router Plane is indispensable for any work that requires an area cut to a precise and consistent depth, such as recesses for installing hinges and lock strikes, or relief carving. The body of the small router plane has been shaped not only for comfort, but also for ideal registration to the workpiece. The flared footprint and bridge ensure maximum contact with the workpiece, even when approaching from the side or working the edge. The spring pressure supplied by the blade locking knob will hold the blade when making adjustments and the position of the clamping knob behind the blade will ensure chip clearance, but will not block visibility.

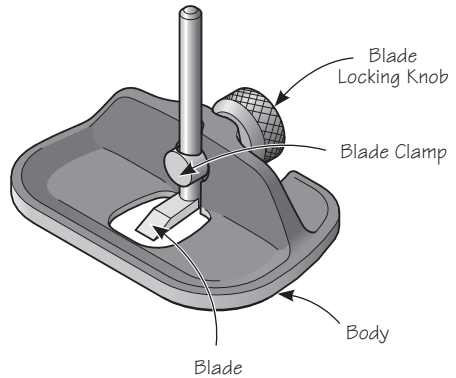


Figure 1: Plane components.

Blade Adjustment

 **Caution:** Blade is sharp.

To initially set the blade, back off the locking knob, then feed the blade up through the clamping mechanism from the bottom of the plane. Spring pressure will prevent the blade from falling free while setting the depth of cut to an established dimension or incrementally while creating a cut. Tighten locking knob to secure blade. The blade can be adjusted to a depth of 1".

Blade Orientation

The blade may be positioned inboard for regular closed-throat use (**Figure 2**) or outboard for true bullnose work (**Figure 3**), where the cutting edge of the blade extends beyond the body. To switch from one orientation to another, loosen the locking knob, remove the blade, and withdraw the blade clamping mechanism. Position the blade clamping mechanism in the desired orientation, reinstall the blade, and tighten the locking knob.




Figure 2: Inboard.




Figure 3: Outboard.

Blade Sharpening

The 1/4" wide high-carbon steel blade has the bevel ground at a 25° angle and is best sharpened on a water stone. Hone the bevel and lap the bottom on a stone.

Care and Maintenance

The body of this plane is ductile cast iron and comes treated with rust preventative. Remove this using a rag dampened with mineral spirits. Clean all machined surfaces.

We recommend that you initially, then periodically, apply a light coat of silicone-free paste wax to seal out moisture and prevent rusting (as well as act as a lubricant for smoother planing). Wipe off any wood dust from the surfaces that you will be waxing, apply a light wax coating, let dry, then buff with a clean soft cloth. At the same time, the solvents in the wax will remove any harmful oils left from your fingers that can lead to corrosion.

If storage conditions are damp or humid, the plane should, in addition to the treatment outlined above, be wrapped in a cloth or stored in a plane sack. This precaution will also guard against dings and scratches.

Accessories

05P38.51 Replacement Blade

05P38.52 Optional Depth Stop